AMENDMENTS TO THE CLAIMS

1-74. (canceled)

75. (previously presented): A proton-conducting membrane designed to serve as an electrolyte in a fuel cell, which membrane consists essentially of

a single metal or metal hydride support, wherein

one or both faces of said support is coated with an electronically-insulating proton-conducting coating, which coating consists of an inorganic material that contains no liquid phase, said coating having a thickness such that the area-specific resistance for protons is in the range of $0.01\text{-}100\ \Omega\text{.cm}^2$ at at least one temperature between 220°C and 550°C.

- 76. (currently amended): The eomponent-membrane of claim 75, wherein the metal or the metal contained in the metal hydride is palladium, titanium, silver, copper, vanadium, lanthanum, nickel, iron, chromium or alloys thereof.
- 77. (currently amended): The eomponent-membrane of claim 76, wherein the metal or metal in the metal hydride is selected from the group consisting of Pd, PdAg, PdCu, Ti, LaNi₅, TiFe and CrV₂, V/Ni/Ti, V/Ni and V/Ti.
- 78. (currently amended): The <u>component</u> of claim 75, wherein the <u>EIPC</u> <u>electronically-insulating proton-conducting</u> coating is selected from the group consisting of:

```
mesoporous zirconium phosphate pyrophosphate, Zr(P_2O_7)_{0.81}; Ba_3Ca_{1.18}Nb_{1.82}O_{8.73}-H_2O; Cs_5H_3(SO_4)_4.0.5H_2O; a hydrate of SnCl_2; silver iodide tetratungstate Ag_{26}I_{18}W_4O_{16}; KH_2PO_4;
```

tetraammonium dihydrogen triselenate, (NH₄)₄H₂(SeO₄)₃;

sd-342078 2

CsDSO₄;

CsH₂PO₄;

 $Sr[Zr_{0.9}Y_{0.1}]O_{3-\delta};$

a silica-polyphosphate composite containing ammonium ions;

 $La_{0.9}Sr_{0.1}Sc_{0.9}Mg_{0.1}O_3$; and

BaCe_{0.9-x}Zr_x $M_{0.1}O_{3-\delta}$ where M is Gd or Nd and x = 0 to 0.4.

79. (currently amended): The eomponent-membrane of claim 75, wherein the electronically-insulating proton-conducting coating consists of

Ba₃Ca_{1.18}Nb_{1.82}O_{8.73}-H₂O;

CsH₂PO₄;

 $Sr[Zr_{0.9}Y_{0.1}]O_{3-\delta};$

polyphosphate composite containing 19.96 wt% NH₄⁺, 29.3 wt% P, 1.51 wt% Si;

 $La_{0.9}Sr_{0.1}Sc_{0.9}Mg_{0.1}O_3$; or

BaCe_{0.9-x}Zr_xM_{0.1}O_{3- δ} where M is Gd or Nd and x = 0 to 0.4.

- 80. (currently amended): The eomponent-membrane of claim 75, wherein the thickness of the metal or metal hydride is $5-1,000 \mu m$.
- 81. (currently amended): The eomponent-membrane of claim 80, wherein the thickness of the metal or metal hydride is 10-200 μm .
- 82. (currently amended): The component membrane of claim 75, wherein the areaspecific resistance for protons at at least one temperature between 220°C and 550°C is about $0.150 \,\Omega.\text{cm}^2$.

3

83. (canceled)

84. (previously presented): A proton-conducting membrane designed to serve as an electrolyte in a fuel cell, which membrane consists essentially of

a single metal or metal hydride support, wherein

one or both faces of said support is coated with an electronically-insulating proton-conducting coating, which coating consists of an inorganic material that contains no liquid phase, said coating having a thickness such that the ASR for protons at at least one temperature between 220°C and 550°C is in the range shown for Nafion® 117 in Figure 10:

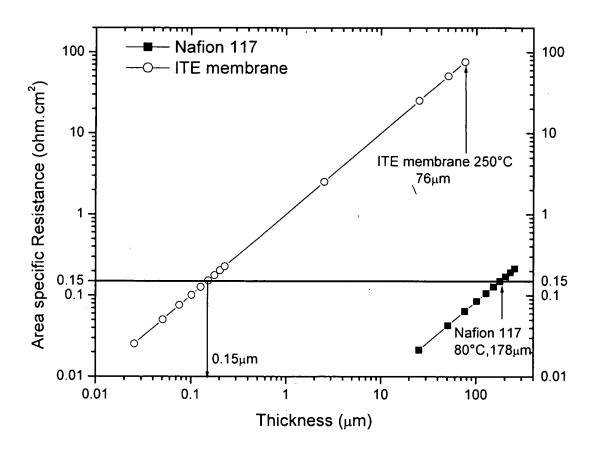


Figure 10.

sd-342078 4

85. (currently amended): The eomponent membrane of claim 84, wherein the metal or the metal contained in the metal hydride is palladium, titanium, silver, copper, vanadium, lanthanum, nickel, iron, chromium or alloys thereof.

- 86. (currently amended): The eomponent membrane of claim 85, wherein the metal or metal in the metal hydride is selected from the group consisting of Pd, PdAg, PdCu, Ti, LaNi₅, TiFe and CrV₂, V/Ni/Ti, V/Ni and V/Ti.
- 87. (currently amended): The component membrane of claim 84, wherein the electronically-insulating proton-conducting coating is selected from the group consisting of:

mesoporous zirconium phosphate pyrophosphate, Zr(P₂O₇)_{0.81};

```
Ba<sub>3</sub>Ca<sub>1,18</sub>Nb<sub>1,82</sub>O<sub>8,73</sub>-H<sub>2</sub>O;
```

 $Cs_5H_3(SO_4)_4.0.5H_2O;$

a hydrate of SnCl₂;

silver iodide tetratungstate Ag₂₆I₁₈W₄O₁₆;

KH₂PO₄;

tetraammonium dihydrogen triselenate, (NH₄)₄H₂(SeO₄)₃;

CsDSO₄;

CsH₂PO₄;

 $Sr[Zr_{0.9}Y_{0.1}]O_{3-\delta};$

a silica-polyphosphate composite containing ammonium ions;

 $La_{0.9}Sr_{0.1}Sc_{0.9}Mg_{0.1}O_3$; and

BaCe_{0.9-x}Zr_xM_{0.1}O_{3- δ} where M is Gd or Nd and x = 0 to 0.4.

88. (currently amended): The eomponent-membrane of claim 84, wherein the electronically-insulating proton-conducting coating consists of

```
Ba<sub>3</sub>Ca<sub>1.18</sub>Nb<sub>1.82</sub>O<sub>8.73</sub>-H<sub>2</sub>O;
```

CsH₂PO₄;

 $Sr[Zr_{0.9}Y_{0.1}]O_{3-\delta};$

sd-342078 5

polyphosphate composite containing 19.96 wt% NH_4^+ , 29.3 wt% P, 1.51 wt% Si; $La_{0.9}Sr_{0.1}Sc_{0.9}Mg_{0.1}O_3$; or $BaCe_{0.9-x}Zr_xM_{0.1}O_{3-\delta}$ where M is Gd or Nd and x=0 to 0.4.

- 89. (currently amended): The eomponent-membrane of claim 84, wherein the thickness of the metal or metal hydride is $5-1,000 \mu m$.
- 90. (currently amended): The eomponent-membrane of claim 89, wherein the thickness of the metal or metal hydride is $10-200 \mu m$.
- 91. (currently amended): The <u>component membrane</u> of claim 84, wherein the areaspecific resistance for protons at at least one temperature between 220°C and 550°C is about $0.150~\Omega.cm^2$.
 - 92. (canceled)

sd-342078 6